




GL800 is Namis wellproven screw/nut lift designed for person-, heavy goods traffic.

Suitable areas of use are, for example, business premises, industries, restaurants and so on where there is a need to transport heavier or bulkier goods.

- Self supporting shaft
- Platform size can be customized to requirements.
- Only 70 mm pit
- For inside and outside installation

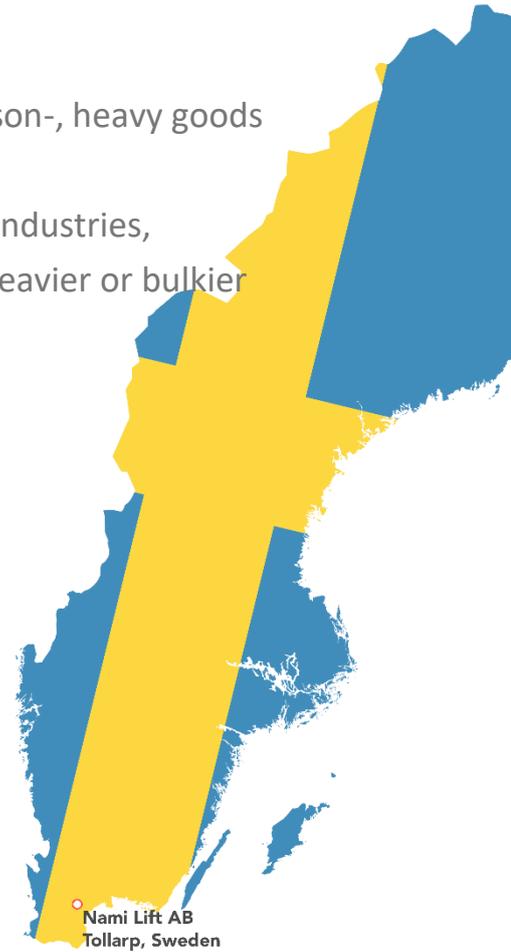

GENERAL

Nami GL800 is a screw-driven lift with a self-supporting shaft. This makes it easy to place as it requires minimal intervention in the building. Completely hidden machine-room as standard.

DRIVE

Frequency controlled motor. Screw drive with electric monitoring on carrier and safety nut.

LIFTING CAPACITY

Max load 800 kg.

TRAVEL

0 – 13 meter, up to 6 landings

MAX SPEED

0,15 m/s

PLATFORM SIZE

Standard 1100 x 1700mm. Can be customized to requirements.
Width min/max: 500/1300mm. Length min/max 1100/2000mm. Max area 2,0m²

SHAFT SIZE

1500x1800 mm

PIT / RAMP

70 mm

ELECTRIC CONNECTION

3-PHASE 400V, 20A

DOORS


Clear opening 900 x 2000 mm, glaspanel A1: 75 x 600mm. Can be customized to requirements.

Electric doorlock

GLAZING

Glaspanels on shaftwalls is available as an option. Possible with glaspanels on three sides.

STANDARD COLOURS



The shaft is made of hot-dip galvanized sheet which is laminated with plastic foil in the desired colours. More colours are available, see <https://metalcolour.com/decorative/design-samples/>

EMERGENCY TELEPHONE

SafeLine emergency phone, other options available

FLOOR

5-bar serrated aluminium sheet metal

TECHNICAL COMPLIANCE

According to
Machine directive 2006/42/EC
European standard EN 81-41

